



More Tracks.
More Possibilities.

3 + TRACKS
Multiple Track Options



INNOVATIVE
DESIGN




MINIMAL APPEARANCE
MAXIMUM VIEW



MAXIMUM
SAFETY

TECHNICAL SPECIFICATIONS

1 3/8" x 1 3/16"	INTERLOCKING SASH PROFILE
1 1/16" x 2 1/2"	LOCK-SIDE SASH PROFILE
3 3/4" x 1 1/16"	TRIPLE-TRACK BOTTOM FRAME PROFILE
3 3/4" x 3/4"	SIDE FRAME PROFILE
3 3/4" x 19/16"	TOP FRAME PROFILE



Flexible Track Configuration
Thanks to its specially designed top and side frame profiles, the system offers track options starting from three tracks, with the flexibility to add more tracks according to project requirements.

Project-Specific Panel Configuration
Additional frame profiles make it possible to achieve the required number of panels. Different panel widths and opening configurations can be arranged to suit the openings specified by the project.


Insulated Glass Compatibility
The insulated-glass sash profiles are compatible with 5/32" + 5/8" + 5/32" and 1/4" + 1/2" + 1/4" glazing configurations, providing solutions for a variety of project requirements

Single Glass Options
Single-glass applications using 8 mm or 10 mm glass can be achieved with single-glass adapter profiles.

i Glass can be selected according to the required level of insulation and the intended application.

SYSTEM FEATURES

- Expandable **Number of Tracks** ✓
- Project-Specific** Panel Configuration ✓
- Compatible with **Insulated and Single Glass** ✓
- Alternative Panel Widths** ✓
- Flexible Opening** Options ✓

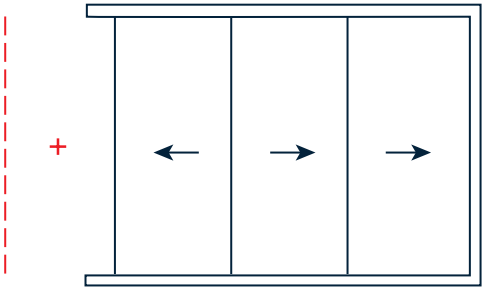

i **Project-Specific** Panel Configuration

